

# FIXIE CLIPS TOP-MOUNT


Spark R&D will not be held liable for product damage due to user error. Read all instructions before beginning!

## Compatibility:

**Compatible** with two piece splitboards that have inserts at the clip mounting points (you will not see any screw heads on the base of your board).

**Not compatible** with 3-piece or 4-piece splitboards.


## Included Parts




2x Fixie Clips Left 2x Fixie Clips Right



4x M5 Grip Washers




8x M5x10mm Coarse Thread Screws



8x M5x9mm Fine Thread Screws

## Installation Tools




Spark Tool



or 3mm hex key


## Fixie Clip Installation

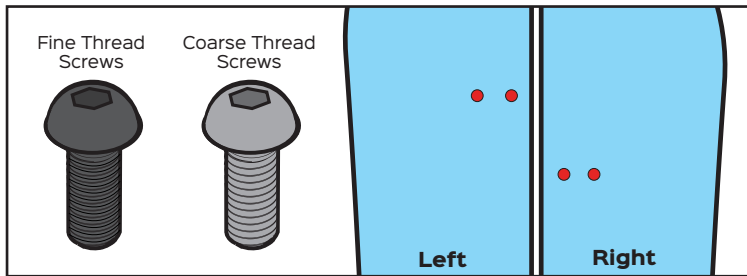

### INSTALLATION STEP 1


Remove all of your old clip hardware. Screws from your old clips CANNOT be used for Fixie Clip installation. Clean the bottom of each insert of any threadlocker. Compare one of the removed screws (or an insert if there were no clips) with a silver coarse thread screw. If the threads look the same then you will use the silver coarse thread screws. If the threads in the removed screw or insert look smaller, you will use the black fine thread screws. Check by installing the chosen screw into the insert a few threads by hand (without a tool), it should be easy to do so. If you can't thread it in try the other style screw.

**Caution:** Use of the wrong screws can damage your splitboard inserts. Be extra careful with the fine thread screws, they are easier to strip or cross thread.

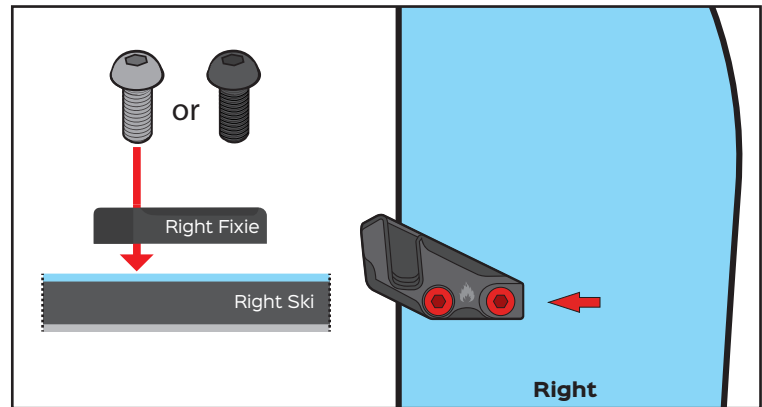


### STEP 2

With your board halves apart, securely tighten both right Fixie Clips on your right ski using 2x M5x10mm (coarse thread) or 2x M5x9mm (fine thread) hex screws.

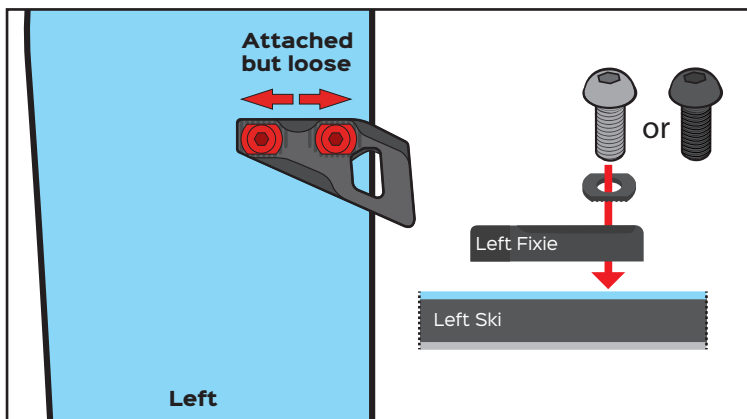

### STEP 3

Attach both left Fixie Clips on your left ski using 2x M5x10mm (coarse thread) or 2x M5x9mm (fine thread) through one grip washer for each threaded hole. Do not tighten these screws, keep them loose allowing the clip to move side to side until step 4.

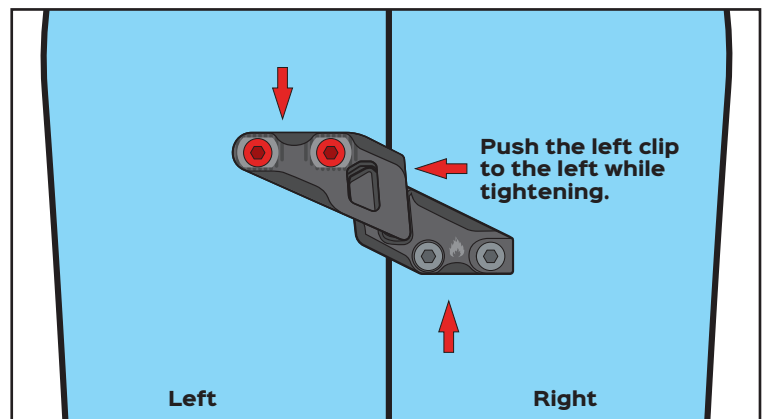

### STEP 4

Connect your two splitboard halves while the left clips remain loose. Once together push the middle seam together by either attaching your bindings into ride mode or pushing the board halves together manually. Push the left clip to the left while tightening the left clip screws.

# Fixie Clips Continued

## STEP 5 - Complete your splitboard

Test your splitboard clip connection by sliding your splitboard apart and re-attaching it. If your splitboard edges don't touch underneath the clip, take apart the two board halves, loosen the left clip screws, nudge the left clip to the left, and re-tighten the screws. Too tight? Take apart the board halves, loosen the left clip screws, nudge the left clip to the right, and re-tighten the screws.

